

三相複巻ケース入変圧器

3WTC-
(受注生産)



3WTC-500~2K



3WTC-2.5K~5K



3WTC-5K: ブレーカーは特別注文



3WTC-10K: キャスターは特別注文

B種絶縁
概略寸法表

標準電圧 : Pri. 400 V / Sec. 200 V
塗装色 : マンセル 5Y7/1

単位 mm

型名	容量	W	D	H	E	I	C	A	B±2	φ	質量 kg	図
3WTC-500	500 VA	220	300	200	20	/	180	200	200	7	16	1
3WTC-750	750 VA	220	300	200	20	/	180	200	200	7	18	1
3WTC-1K	1 kVA	270	340	250	20	/	220	245	240	9	24	1
3WTC-1.5K	1.5 kVA	270	340	250	20	/	220	245	240	9	29	1
3WTC-2K	2 kVA	270	340	250	20	/	220	245	240	9	34	1
3WTC-2.5K	2.5 kVA	305	430	320	40	45	/	265	300	11	46	2
3WTC-3K	3 kVA	305	430	320	40	45	/	265	300	11	51	2
3WTC-4K	4 kVA	305	430	320	40	45	/	265	300	11	64	2
3WTC-5K	5 kVA	305	470	400	40	45	/	265	300	11	77	2
3WTC-7.5K	7.5 kVA	355	480	450	50	45	/	310	300	13	101	2
3WTC-10K	10 kVA	355	580	450	50	45	/	310	400	13	140	2
3WTC-15K	15 kVA	355	600	500	50	55	/	310	400	13	180	2
3WTC-20K	20 kVA	405	700	550	50	55	/	360	500	14	220	2
3WTC-25K	25 kVA	405	700	600	75	55	/	250	665	14	250	3
3WTC-30K	30 kVA	405	750	650	75	65	/	250	715	14	330	3
3WTC-40K	40 kVA	405	750	750	75	65	/	250	715	14	420	3
3WTC-50K	50 kVA	455	850	800	75	65	/	300	815	14	470	3
3WTC-75K	75 kVA	655	900	850	75	65	/	400	865	14	680	3
3WTC-100K	100 kVA	655	1000	950	75	65	/	400	965	14	780	3

図 1

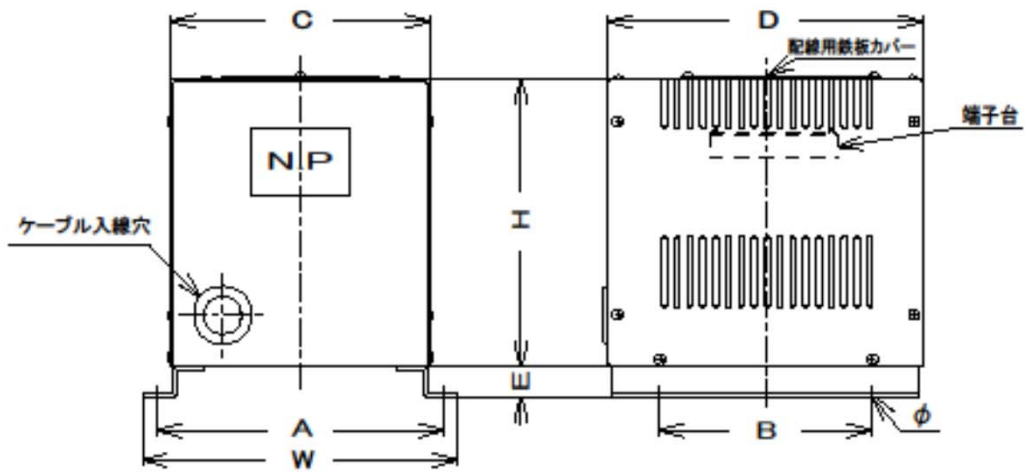


図 2

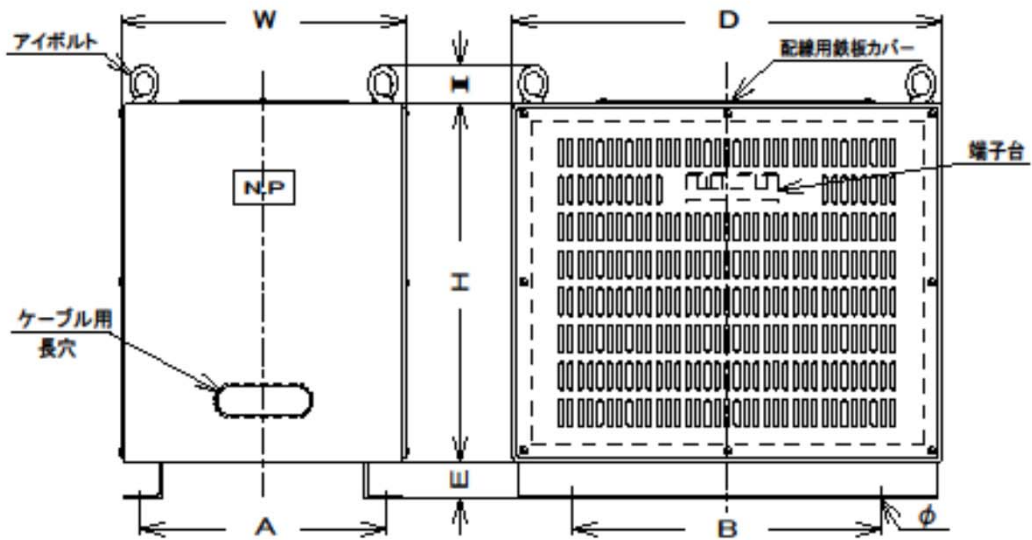


図 3

